



Market-leading professional audio products and system solutions.



ABOUT US



Dare Audio Equipment Technology Co., Ltd Foshan Shunde Are Audio Factory

Established in 2008. Base on the powerful R&D team have great acoustic and physical knowledge, self development and improvement. We supply many leading technology professional sound reinforcement products for over 15 years.

Our main products: active/passive line array, active/passive subwoofer, active/passive fullrange speaker, active/passive monitor, 1U professional power amplifier, DSP power amplifier and audio processor etc.

The products of Dare strict implement IEC standard. We always keep the quality of our product rigorous, reliable and high technology.

Perfect sound reinforcement, smaller, lighter, easier system connection, more intelligent tuning, and more reliable experience. These are the kernel of the development in Dare company.

Main Shows we attended in the past:

2011-2025

Prolight&Sound Guangzhou Fair

2015-2024

Prolight&Sound Shanghai Fair



Dare Audio Equipment Technology Co., Ltd

Foshan Shunde Are Audio Factory

Add : Floor 1, Unit 1, BLDG1, No.28 Sanle Rd., Beijiao,
Shunde Dist., Foshan, Guangdong, China, 528311.

E-mail: master@dareaudio.com

Web: <https://en.dareaudio.com>



DAREAUDIOOFFICIAL
Facebook contact




@DAREAUDIOOFFICIAL




DAREAUDIOOFFICIAL
WhatsApp contact

LONG PASSIVE VERTICAL ARRAY

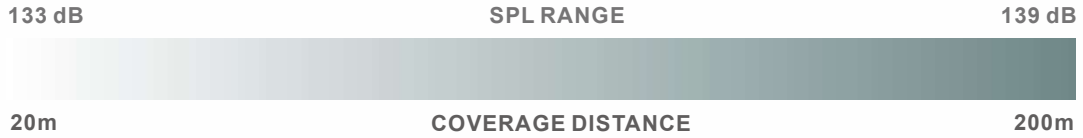


Adopting a dual axis design, a high-performance two way line array module, and speaker cabinet with a low-frequency reflective design uses two low-frequency driver and two high-frequency driver to form a constant pointing high-frequency line sound source, VA25,VA30 use the lightweight and passive frequency design of high-frequency neodymium HF driving unit, and a long-distanced horn.

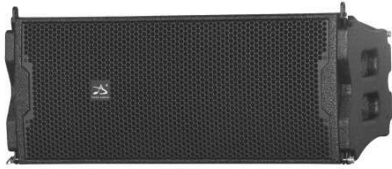

- 2 low-frequency drivers and 2 high-frequency drivers
- 110° symmetrical horizontal coverage range
- 15° vertical control angle
- Multi layer birch plywood
- Polyurea waterproof painting
- Ultra low distortion driving unit

Model	VA16	VA20	VA25	VA30
Driver	LF:2x8" HF:2x1"	LF:2x10" HF:2x2"	LF:2x12" HF:2x3"	LF:2x15" MF:2x4" HF:2x2"
DC-Impedance(Ohm)	4.8 Ohm	19.2 Ohm	12.8 Ohm	9.6 Ohm
Frequency Range(Hz/-10db)	80-20k	70-20k	60-20k	50-20k
Rated Power(W)	600	600	800	1000
Peak Voltage(V)	100	200	200	200
Peak Current(A)	20	10	15	20
Peak Power(w)	2400	2400	3200	4000
Sensitivity(db/m.w)	99	101	102	103
Maximum SPL(db)	133	135	137	139
Coverage Angle(H°xV°)	110x15°	110x15°	110x15°	90x10°
Dimension(W×H×D)	62x24x30	72x29x35	82x34x40	1200x43x50
Weight(kg)	18	26	32	50

PASSIVE BANDPASS SUBWOOFER

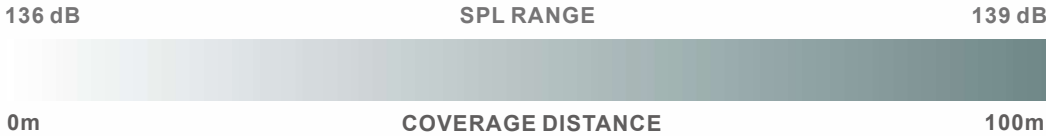

Bandpass subwoofer with powerful low-frequency energy and slastic strength, designed with a long distance bandpass structure, heart-shaped cpverage angle. and driven by the A-series digital power amplifier.




- 1 low-frequency drivers
- Multi layer birch plywood
- Polyurea waterproof painting
- Band through structure
- Ultra low distortion driving unit

Model	BS18 BS18A	BS21 BS21A	BS24
Driver	1x18"	1x21"	1x24"
DC-Impedance(Ohm)	9.6 Ohm	6.4 Ohm	4.8 Ohm
Frequency Range(Hz/-10db)	30-100	30-100	30-90
Rated Power(W)	1000	1500	2000
Peak Voltage(V)	200	200	200
Peak Current(A)	20	30	40
Peak Power(w)	4000	6000	8000
Sensitivity(db/m.w)	100	101	103
Maximum SPL(db)	136	139	141
Coverage Angle(H°xV°)	**	**	**
Dimension(W×H×D)	80x60x60	80x60x80	80x60x120
Weight(kg)	40	50	50



PASSIVE BANDPASS SUBWOOFER

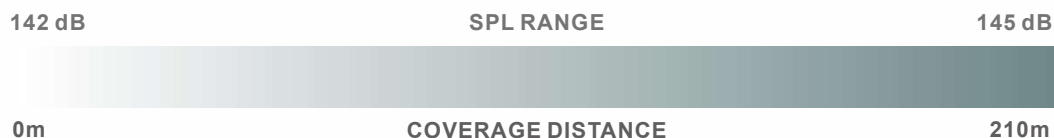


A two drivers bandpass subwoofer with powerful low-frequency energy and slastic strength, designed with a long distance bandpass structure, heart-shaped coverage angle, and driven by the A-series digital power amplifier.



- 2 low-frequency drivers
- Multi layer birch plywood
- Polyurea waterproof painting
- Band through structure
- Ultra low distortion driving unit

Model	BS36	BS42
Driver	2x18"	2x21"
DC-Impedance(Ohm)	4.8 Ohm	3.2 Ohm
Frequency Range(Hz/-10db)	30-100	30-100
Rated Power(W)	2000	3000
Peak Voltage(V)	200	200
Peak Current(A)	40	60
Peak Power(w)	8000	12000
Sensitivity(db/m.w)	103	104
Maximum SPL(db)	142	145
Coverage Angle(H°xV°)	**	**
Dimension(W×H×D)	120x60x80	120x60x120
Weight(kg)	80	100

PASSIVE HORIZONTAL ARRAY

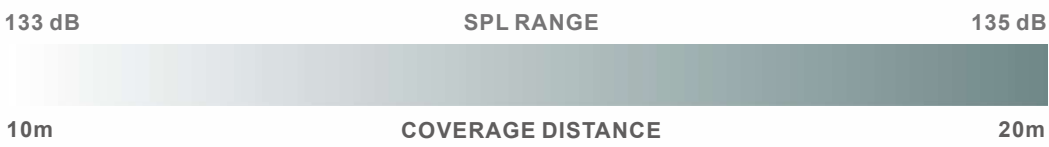

- 1 low-frequency drivers and 1 high-frequency drivers
- 90° symmetrical horizontal coverage range
- 60° vertical control angle
- Multi layer birch plywood
- Compact appearance and high efficient performance
- Ultra low distortion driving unit

Model	HA15	HA16
Driver	LF:1x15" HF:1x2"	LF:1x15" HF:1x3"
DC-Impedance(Ohm)	4.8 Ohm	4.8 Ohm
Frequency Range(Hz/-10db)	60-20k	60-20k
Rated Power(W)	500	500
Peak Voltage(V)	100	100
Peak Current(A)	20	20
Peak Power(w)	2000	2000
Sensitivity(db/m.w)	100	102
Maximum SPL(db)	133	135
Coverage Angle(H°xV°)	90x60°	90x60°
Dimension(WxHxD)	42x67x48	42x67x48
Weight(kg)	25	27



PASSIVE MULTIPURPOSE POINT SOURCES




High performance low-frequency reflective two way speaker, including one low-frequency driver and one neodymium magnetic high-frequency driving unit, widely suitable for various fixed installation application places. Light weight, passive crossover design, P16 use high-frequency neodymium driver and wide directional horn.




- 1 low-frequency drivers and 1 high-frequency drivers
- 90° symmetrical horizontal coverage range
- 60° vertical control angle
- Multi layer birch plywood
- Compact appearance and high efficient performance
- Ultra low distortion driving unit

Model	P10	P12	P15	P16
Driver	LF:1x10" HF:1x2"	LF:1x12" HF:1x2"	LF:1x15" HF:1x2"	LF:1x15" HF:1x3"
DC-Impedance(Ohm)	9.6 Ohm	6.4 Ohm	4.8 Ohm	4.8 Ohm
Frequency Range(Hz/-10db)	60-20k	50-20k	40-20k	40-20k
Rated Power(W)	300	400	500	500
Peak Voltage(V)	100	100	100	100
Peak Current(A)	10	15	20	20
Peak Power(w)	1200	1600	2000	2000
Sensitivity(db/m.w)	98	99	100	102
Maximum SPL(db)	129	131	133	135
Coverage Angle(H°xV°)	90x60°	90x60°	90x60°	90x60°
Dimension(W×H×D)	30x48x33	35x54x39	42x67x46	42x67x48
Weight(kg)	14	18	25	27

ACTIVE/PASSIVE MONITOR

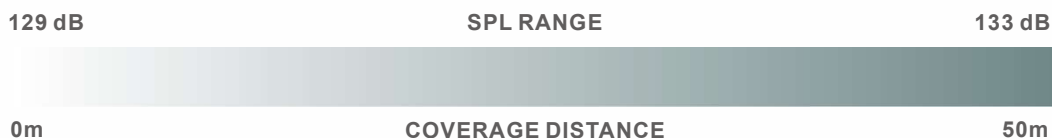

A high-performance two way stage monitor speaker, using a low-frequency driver with large dynamic design and a high-frequency neodymium magnetic driver with horn. its constant coverage angle is 90 ° x 60 ° (horizontal x vertical), and its unique horn can accurately cover the stage area. When vertically arranged, it can be used as a powerful main sound system.

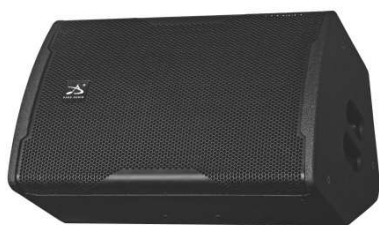

- 1 low-frequency drivers and 1 high-frequency drivers
- 35°,55°elevation angle switching
- Multi layer birch plywood
- Polyurea waterproof painting
- Compact appearance and high efficient performance
- Ultra low distortion driving unit

Model	M10 M10A	M12 M12A	M15 M15A	M4
Driver	LF:1x10" HF:1x1.8"	LF:1x12" HF:1x2"	LF:1x15" HF:1x2"	LF:1x15" HF:1x2"
DC-Impedance(Ohm)	9.6 Ohm	6.4 Ohm	4.8 Ohm	4.8 Ohm
Frequency Range(Hz/-10db)	60-20k	50-20k	40-20k	50-20k
Rated Power(W)	300	400	500	500
Peak Voltage(V)	100	100	100	100
Peak Current(A)	10	15	20	20
Peak Power(w)	1200	1600	2000	2000
Sensitivity(db/m.w)	98	99	100	100
Maximum SPL(db)	129	131	133	133
Coverage Angle(H°xV°)	90x60°	90x60°	90x60°	90x60°
Dimension(W×H×D)	30x48x33	35x54x39	42x67x46	42x57x37
Weight(kg)	14	18	25	25

R1 NEARFIELD SOUND REINFORCEMENT SYSTEM



Model	P20	BS15
Driver	LF:2x10" HF:1x3"	1x15"
DC-Impedance(Ohm)	4.8 Ohm	3.2 Ohm
Frequency Range(Hz/-10db)	40-20k	30-90
Rated Power(W)	600	600
Peak Voltage(V)	100	100
Peak Current(A)	20	30
Peak Power(w)	2400	2400
Sensitivity(db/m.w)	101	99
Maximum SPL(db)	135	133
Coverage Angle(H°xV°)	90x60°	**
Dimension(W×H×D)	28x80x32	45x80x60
Weight(kg)	27	35



DSP CLASS-D AMPLIFIER

2 Channel

4 Channel


Energy dynamic analysis technology: independently analyze and process the audio signal input and power output, as well as the frequency bands and time segments. Calculate the accumulated heat for the high-frequency and low-frequency speakers over different time intervals, and precisely allocate power output to allow the speakers to operate at their dynamic energy limits for extended periods, providing stable protection to prevent damage to the speaker units.

Dynamic Distortion Compensation Technology: The power amplifier performs real-time analysis and receives the current real-time status of the audio line, providing feedback on the phase distortion and nonlinear distortion of the speakers. Through subtle calculations and processing, it determines the optimal distortion compensation, significantly enhancing the performance of the speakers and enabling more precise modification for coloration and enhancement of audio quality. This technology showcases new applications and trends in audio products.



Model	A82	A83	A84
DC-Impedance	3.2/3.2	1.6/1.6/ 3.2/Parallel	1.6/1.6/ 1.6/1.6
Peak output voltage	200/200	100/100/ 200/Parallel	100/100/ 100/100
Peak output current	60/60	60/60/ 60/Parallel	60/60/ 60/60
Max output power	6000/6000	3000/3000/ 6000/Parallel	3000/3000/ 3000/3000
Total output power	8000	8000	8000
Maximum Input voltage	+6dBu	+6dBu	+6dBu
Modulation frequency	350kHz	350kHz	350kHz
Total Harmonic Distortion	< 0.03%	< 0.03%	< 0.03%
Frequency response	10Hz - 22 KHz	10Hz - 22 KHz	10Hz - 22 KHz
SN ratio	100dB	100dB	100dB
Power factor	>80%	>80%	>80%
Standby consumption	>0.85	>0.85	>0.85
Power supply range(AC/DC)	10w/25w	10w/25w	10w/25w
Dimensions(mm)	90~260V	90~260V	90~260V
Weight	480x44x200	480x44x200	480x44x200
	4Kg	4Kg	4Kg

MID&LONG ACTIVE/PASSIVE VERTICAL ARRAY

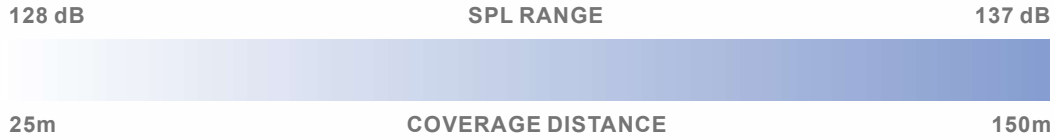


Ultra compact line array speakers. Stable working with DARE DSP Integrated amplifier at maximum level. Easy installation and rain-proof cabinet. L-Series speakers uses new technology waveguide horn and same surface driver layout design to make a ultra-long distance. Use for kinds of installation and live shows.



Model	L10C	L16	L20 L20A	L24 L24A
Driver	LF:1x10", HF:1x2"	LF:2x8" HF:2x1"	LF:2x10" HF:2x2"	LF:2x12" HF:2x2"
DC-Impedance	9.6 Ohm	4.8 Ohm	19.2 Ohm	12.8 Ohm
Frequency Range	80-20k	80-20k	70-20k	60-20k
Rated Power	250	450	600	700
Peak Voltage	100	100	200	200
Peak Current	10	20	10	15
Peak power	1000	1800	2400	2800
Sensitivity	98	100	101	102
Maximum SPL	128	132	135	137
Coverage Angle	100x15	110x15	110x15	110x15
Dimensions	28x30x32	62x24x30	72x29x35	82x34x40
Weight	12	18	26	32

ACTIVE/PASSIVE SUBWOOFER

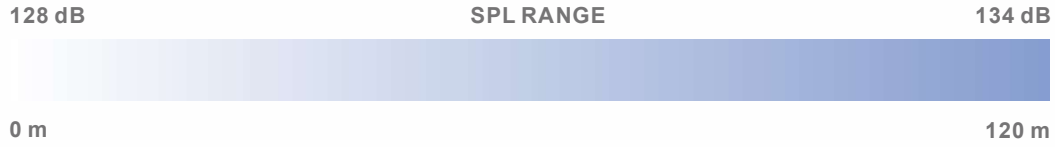


Low frequency extend for regular sound reinforcement system. All models installed ultra high amplitude drivers. Low airflow noise at the all tubes and holes base on the innovated cabinet design. Maximise the dynamic range and audio performance.



S18 S18A	S21 S21A	S24 S24A	S36
1x18"	1x21"	1x24"	2x18"
9.6 Ohm	6.4 Ohm	4.8Ohm	4.8Ohm
25-200	25-200	25-200	25-200
500	600	800	1000
200	200	200	200
20	30	40	40
2000	2400	3200	4000
95	96	97	98
128	130	132	134
--	--	--	--
62x52x60	72x59x60	82x66x60	120x52x80
35	45	55	65

ACTIVE/PASSIVE MULTIPURPOSE POINT SOURCES

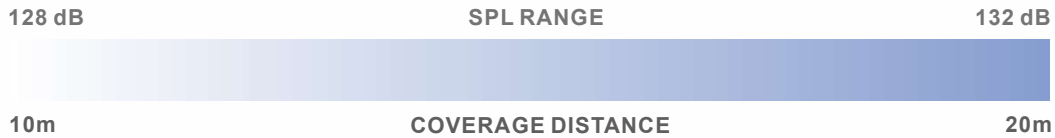

Enhanced high energy magnet, advanced driver ventilate design. Long fiber water proof cone and high power voice coil. Use wide direction horns for a wide coverage range. With DARE DSP amplifier or internal amplifier module for a high performance and stability sound system.



- 1 low-frequency drivers and 1 high-frequency drivers
- 90° symmetrical horizontal coverage range
- 60° vertical control angle
- Multi layer birch plywood
- Compact appearance and high efficient performance

Model	F10 F10A	F12 F12A	F15 F15A
Driver	LF:1x10" HF:1x1.8"	LF:1x12" HF:1x1.8"	LF:1x15" HF:1x1.8"
DC-Impedance(Ohm)	9.6 Ohm	6.4 Ohm	4.8 Ohm
Frequency Range(Hz/-10db)	60-20k	50-20k	40-20k
Rated Power(W)	250	300	400
Peak Voltage(V)	100	100	100
Peak Current(A)	10	15	20
Peak Power(w)	1000	1200	1600
Sensitivity(db/m.w)	98	99	100
Maximum SPL(db)	128	130	132
Coverage Angle(H°xV°)	90x60	90x60	90x60
Dimension(W×H×D)	30x48x33	35x54x39	42x67x46
Weight(kg)	14	18	25

DSP CLASS-D AMPLIFIER

2 Channel

4 Channel

Amplifier feature

- > Built-in DSP processor system
- > Wide voltage support, 90-250V
- > Overtemperature protection overload power control
- > Output DC protection
- > Peak limiting pressure limiter
- > Energy dynamic analysis technology
- > Dynamic Distortion Compensation Technology
- > Power undervoltage protection
- > Module temperature, voltage, current, and fault status monitoring for each channel
- > Temperature power control



Model	D62	D63	D64	D34	D35
DC-Impedance	4.8/4.8	2.4/2.4/ 4.8/Parallel	2.4/2.4/ 2.4/2.4	3.2/3.2/ 3.2/3.2	3.2/3.2
Peak output voltage	200/200	100/100/ 200/Parallel	100/100/ 100/100	100/100/ 100/100	100/100
Peak output current	40/40	40/40/ 40/Parallel	40/40/ 40/40	30/30/ 30/30	30/30
Max output power	4000/4000	2000/2000/ 4000/Parallel	2000/2000/ 2000/2000	1500/1500/ 1500/1500	1500/1500
Total output power	6000	6000	6000	4000	4000
Maximum Input voltage	+6dBu	+6dBu	+6dBu	+6dBu	+6dBu
Modulation frequency	350kHz	350kHz	350kHz	350kHz	350kHz
Total Harmonic Distortion	< 0 .03%	< 0 .03%	< 0 .03%	< 0 .03%	< 0 .03%
Frequency response	10Hz - 22 KHz	10Hz - 22 KHz	10Hz - 22 KHz	10Hz - 22 KHz	10Hz - 22 KHz
SN ratio	100dB	100dB	100dB	100dB	100dB
Efficiency	>80%	>80%	>80%	>80%	>80%
Power factor	>0.85	>0.85	>0.85	>0.85	>0.85
Standby consumption	10w/25w	10w/25w	10w/25w	10w/25w	10w/25w
Power supply range(AC/DC)	90~250V	90~250V	90~250V	90~250V	90~250V
Dimensions(mm)	480x44x200	480x44x200	480x44x200	480x44x200	480x44x200
Weight	4Kg	4Kg	4Kg	4Kg	4Kg

DSP AUDIO PROCESSOR

DSP1216 12*16 Audio Processor With Wireless Audio Transmission



48-bit dual-core high-speed DSP; Independent high-performance AADC&DAC 24-bit/48kHz sampling 12-channel input, noise suppression, source selection 16-channel output, input proportional mixing, crossover, 8x11-section parametric equalization, delay, phase, gain, 32 sets of data storage, security lock, five-level user management permissions; PC application software USB RS485 interface protocol communication; Operation limits power amplifier output power.

- > Supports 12 channels of analog input and 16 channels of analog output.
- > Can select any number of channels for mixing from the 12 input channels.
- > 8 DIP switches on the front panel allow for quick preset switching without the need for computer tuning.
- > Sampling bit rate/frequency 24bit/96KHZ, dynamic range 112db.
- > 48-bit floating-point input for digital signal processing.

Model

DSP-1216

Input Channel	12 Channel
Output Channel	16 Channel
Input Level(dBu)	+12dBu
Output Level(dBu)	+12dBu
Output Impedance(Ohm)	50 Ohm
Total Harmonic Distortion(%)	THD<0.003%
Dynamic Range(dB)	112dB
Sample Bit Depth(bit/kHz)	24bit/96kHz
Processing Bit Depth(Bit Float)	32 Bit Float
PC Control Interface	USB+LAN
Power Source(V)	AC90~250V
Power Consumption(W)	10W
Weight(kg)	3kg
Dimension(mm)	482 x 200 x 66mm

Directions

GPS Navigation to

Dare Audio Equipment Technology Co., Ltd
Foshan Shunde Are Audio Factory

Add : Floor 1, Unit 1, BLDG1, No.28 Sanle Rd., Beijiao,
Shunde Dist., Foshan, Guangdong, China, 528311.

HUAZHI Tech Creativity Center

